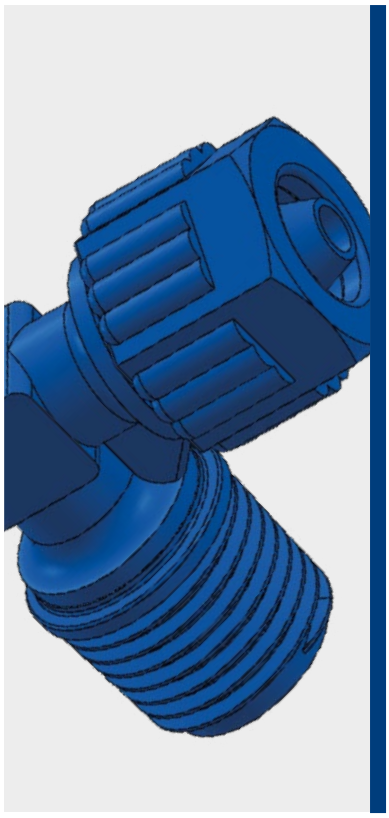

+4°C ÷ +90°C
Subject to applications

Working pressure:
14 Bar (at 20°C)

Compressed air, water and fluids suitable with construction materials

- Taper gas BSPT ISO 7 form R1/8″ to R3/4″
- NPT ANSI B 1.20.1 from N1/8″ to N1/2″

Polyurethane, Polyethylene, Polyamide

Body: Fiber glass reinforced polypropylene
Lock nut: Fiber glass reinforced polypropylene

Food contact materials EC 1935/2004

D.M. 174/2004

Products in compliance with EC Regulation 1907/2006

Products in compliance with the directive EU 2015/863

FEATURES

- The fittings of this series have plastic thread and consecuently we reccomended to avoid excessive force during screwing and to teflon the thread before use in order to prevent any type of loss.
- It is reccomended to insert the tube to the end and tighten the nut before using.
- Cut the part of the tube attached to the fitting in order to reutilize it.

YIELD STRESS OF POLYPROPYLENE

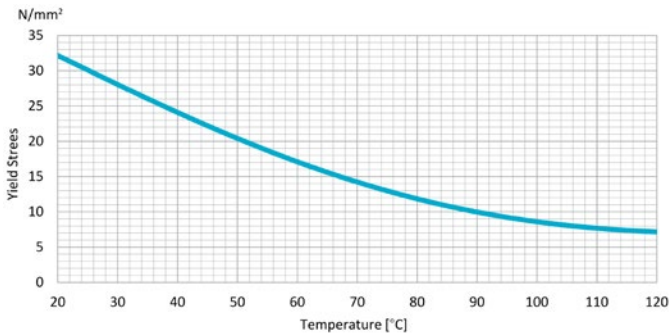

CONSTRUCTION DETAILS

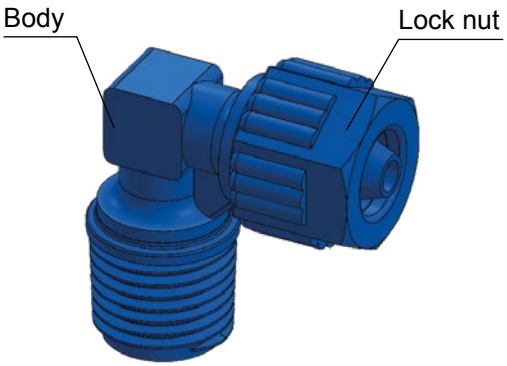

TIGHTENING TORQUE

TAPER GAS BSPT ISO 7

THREAD	1/8″	1/4″	3/8″	1/2″	3/4″
Nm	0,01	0,3	1,3	2,7	5,4

2105 Female connector BSPT thread



CODE	ØD	T	A	L	CH1	CH2	g
2105TR186	6/4	R 1/8"	10,0	26,3	14	14	3,0
2105TR146		R 1/4"	11,0	27,8	14	17	3,0
2105TR188	8/5,5	R 1/8"	9,5	26,3	14	14	3,0
2105TR148		R 1/4"	11,0	28,0	14	17	4,0
2105TR388		R 3/8"	11,2	30,6	14	22	5,0
2105TR128		R 1/2"	13,5	32,5	14	26	6,0
2105TR1410	10/7	R 1/4"	10,0	31,7	17	17	6,0
2105TR3810		R 3/8"	11,0	33,0	17	22	7,0
2105TR1210		R 1/2"	13,8	35,4	17	26	7,0

2110 Male connector BSPT thread



CODE	ØD	T	A	L	CH1	CH2	g
2110TR186	6/4	R 1/8"	8,0	27,5	14	13	3,0
2110TR146		R 1/4"	10,5	29,7	14	14	3,0
2110TR386		R 3/8"	10,5	32,5	14	17	4,5
2110TR126		R 1/2"	13,0	35,5	14	22	6,0
2110TR346		R 3/4"	9,0	36,6	14	27	8,0
2110TR188	8/5,5	R 1/8"	8,0	27,6	14	13	3,0
2110TR148		R 1/4"	10,5	29,5	14	14	3,0
2110TR388		R 3/8"	10,5	31,4	14	17	4,0
2110TR128		R 1/2"	13,0	36,1	14	22	5,0
2110TR348		R 3/4"	9,0	36,6	14	27	8,0
2110TR1410	10/7	R 1/4"	10,5	35,8	17	17	4,0
2110TR3810		R 3/8"	10,5	35,8	17	17	5,0
2110TR1210		R 1/2"	12,0	38,9	17	22	6,0
2110TR3410		R 3/4"	13,0	39,7	17	27	6,0
2110TR1412	12/9	R 1/4"	10,5	37,3	19	14	6,0
2110TR3812		R 3/8"	10,5	37,3	19	17	7,0
2110TR1212		R 1/2"	12,5	40,1	19	22	7,0
2110TR3412		R 3/4"	13,0	40,1	19	27	8,0

2115 Union connector



CODE	ØD1	ØD2	L	CH1	CH2	g
2115TR6	6/4	6/4	32,7	14	14	4,0
2115TR8	8/5,5	8/5,5	32,7	14	14	4,0
2115TR12	12/9	12/9	40,6	19	19	8,0
REDUCED UNION CONNECTOR						
2115TR86	8/5,5	6/4	32,7	14	14	4,0

2130 Female elbow BSPT thread



CODE	ØD	T	A	L	CH1	CH2	g
2130TR186	6/4	R 1/8"	10,5	19,5	14	9	5,0
2130TR146		R 1/4"	12,3	22,5	14	9	5,0
2130TR148	8/5,5	R 1/4"	12,3	22,5	14	9	6,0

2135 Union elbow



CODE	ØD1	ØD2	L	CH1	CH2	g
2135TR6	6/4	6/4	23,3	14	8	4,0
2135TR8	8/5,5	8/5,5	23,5	14	8	4,0
2135TR12	12/9	12/9	32,0	19	15	10,0
REDUCED UNION CONNECTOR						
2135TR86	8/5,5	6/4	23,3	14	8	4,4

2140 Male elbow BSPT thread



CODE	ØD	T	A	L1	L2	CH1	CH2	g
2140TR186	6/4	R 1/8"	8,0	18,5	22,5	14	8	2,0
2140TR146		R 1/4"	10,0	23,0	22,5	14	8	3,0
2140TR188	8/5,5	R 1/8"	8,5	18,5	23,0	14	8	3,0
2140TR148		R 1/4"	11,0	23,0	23,0	14	8	3,0
2140TR388		R 3/8"	11,0	23,5	23,0	14	8	5,0
2140TR1412	12/9	R 1/4"	10,0	24,0	33,0	19	15	7,0
2140TR3812		R 3/8"	10,0	24,5	33,0	19	15	6,0
2140TR1212		R 1/2"	13,0	28,5	33,0	19	15	9,0

2150 Female tee BSPT thread



CODE	ØD	T	A	L	CH1	CH2	g
2150TR186	6/4	R 1/8"	10,2	23,3	14	8	5,82
2150TR148	8/5,5	R 1/4"	12,5	23,4	14	8	5,82

2155 Male tee BSPT thread



CODE	ØD	T	A	L1	L2	CH1	CH2	g
2155TR186	6/4	R 1/8"	9,0	19,0	23,4	14	8	6,0
2155TR146		R 1/4"	11,0	21,0	23,4	14	8	6,0
2155TR188	8/5,5	R 1/8"	9,0	19,0	23,4	14	8	5,0
2155TR148		R 1/4"	11,0	21,0	23,4	14	8	6,0
2155TR388		R 3/8"	11,0	21,0	23,6	14	8	7,0
2155TR1412	12/9	R 1/4"	11,0	21,0	33,5	14	8	12,0
2155TR3812		R 3/8"	10,7	24,5	33,5	19	15	14,0
2155TR1212		R 1/2"	15,0	28,5	33,5	19	15	15,0

2160 Lateral male tee BSPT thread



CODE	ØD	T	A	L	CH1	CH2	g
2160TR186	6/4	R 1/8"	8,5	20,9	14	8	5,0
2160TR146		R 1/4"	11,0	23,1	14	8	5,0
2160TR188	8/5,5	R 1/8"	8,5	20,9	14	8	5,0
2160TR148		R 1/4"	11,0	23,1	14	8	5,0
2160TR388		R 3/8"	10,0	29,4	14	8	7,0
2160TR1412	12/9	R 1/4"	10,0	28,8	19	15	12,0
2160TR3812		R 3/8"	11,0	29,5	19	15	14,0
2160TR1212		R 1/2"	15,0	31,3	19	15	15,0

2165 Union tee



CODE	ØD1	ØD2	L	CH1	CH2	g
2165TR6	6/4	6/4	23,4	14	8	7,0
2165TR8	8/5,5	8/5,5	23,4	14	8	5,0
2165TR12	12/9	12/9	33,55	19	14	14,0
REDUCED UNION TEE						
2165TR68	6/4	8/5,5	46,8	14	8	6,48
2165TR86	8/5,5	6/4	46,8	14	8	6,41

2230 Locking nut



CODE	ØD	ØC	CH	g
2230TR6	6/4	6,2	16	1,0
2230TR8	8/5,5	8,1	16	2,0
2230TR10	10/7	10,2	19	3,0
2230TR12	12/9	12,8	22	4,0

2105N

Female connector NPT thread



CODE	ØD	T	A	L	CH1	CH2	g
2105TRN1814	1/4	N 1/8"	13,0	26,3	16	14	3,0
2105TRN18516	5/16	N 1/8"	-	26,3	16	14	-
2105TRN14516		N 1/4"	-	32,1	16	17	-
2105TRN38516		N 3/8"	-	32,2	19	22	-
2105TRN12516		N 1/2"	-	37,5	22	27	-
2105TRN1438	3/8	N 1/4"	16,5	34,5	19	17	5,0
2105TRN3838		N 3/8"	16,7	34,5	19	22	6,5
2105TRN1238		N 1/2"	-	38,0	19	27	-

2110N

Male connector NPT thread



CODE	ØD	T	A	L	CH1	CH2	g
2110TRN1814	1/4	N 1/8"	8,5	29,4	14	11	2,56
2110TRN1414		N 1/4"	13	34,0	14	14	3,33
2110TRN1214		N 1/2"	18	40,2	14	22	6,76
2110TRN18516	5/16	N 1/8"	8,5	29,4	14	11	2,71
2110TRN14516		N 1/4"	13	34,0	14	14	3,07
2110TRN38516		N 3/8"	13	35,1	14	17	4,17
2110TRN1438	3/8	N 1/4"	13	37,6	17	14	4,39
2110TRN3838		N 3/8"	13	38,6	17	17	5,55
2110TRN1238		N 1/2"	18	43,7	17	22	7,63
2110TRN3438		N 3/4"	-	44,4	17	27	10,12
2110TRN1412	1/2	N 1/4"	13	38,8	19	14	5,11
2110TRN3812		N 3/8"	13	40	19	17	6,18
2110TRN1212		N 1/2"	18	45	19	22	8,34

2115N

Union connector



CODE	ØD1	ØD2	L	CH1	CH2	g
2115TRN14	1/4	1/4	32,5	14	14	4,14
2115TRN516	5/16	5/16	32,6	14	14	4,09
2115TRN12	1/2	1/2	40,4	19	19	8,26

2135N

Union elbow connector



CODE	ØD1	ØD2	L	CH1	CH2	g
2135TRN14	1/4	1/4	23,3	14	8	4,48
2135TRN516	5/16	5/16	23,5	14	8	4,35

2140N

Male elbow NPT thread



CODE	ØD	T	A	L1	L2	CH1	CH2	g
2140TRN1814	1/4	N 1/8"	10	19,5	22,5	14	8	3,2
2140TRN1414		N 1/4"	12,5	23,3	22,5	14	8	3,83
2140TRN18516	5/16	N 1/8"	12,5	23,5	22,5	14	8	3,13
2140TRN14516		N 1/4"	10	19,5	22,5	14	8	3,81

2155N

Male tee NPT thread



CODE	ØD	T	A	L1	L2	CH1	CH2	g
2155TRN1814	1/4	N 1/8"	10	20,3	23,4	14	8	5,25
2155TRN1414		N 1/4"	12,5	25	23,4	14	8	5,74
2155TRN18516	5/16	N 1/8"	10	20,3	23,4	14	8	5,17
2155TRN14516		N 1/4"	12,5	25	23,4	14	8	5,81
2155TRN3812	1/2	N 3/8"	14	30,2	33,5	19	15	13,06
2155TRN1212		N 1/2"	17,5	33	33,5	19	15	13,79

2160N

Lateral male tee NPT thread



CODE	ØD	T	A	L	CH1	CH2	g
2160TRN1814	1/4	N 1/8"	-	21,7	14	8	5,28
2160TRN1414		N 1/4"	-	24,1	14	8	5,88
2160TRN18516	5/16	N 1/8"	10	21,7	14	8	5,04
2160TRN14516		N 1/4"	13,3	24,1	14	8	5,62

2165N

Union tee



CODE	ØD1	ØD2	L	CH1	CH2	g
2165TRN14	1/4	1/4	27,4	14	-	6,52
2165TRN516	5/16	5/16	27,4	14	-	6,29
2165TRN12	1/2	1/2	40,4	19	14	14,84